

ENJOY NATURE WITH OUR FLOORS



GENERAL
FLOORING CATALOG





ENJOY
NATURE
WITH OUR
FLOORS

INDEX

DIVINA CORK FLOORS

01

08 - C Series
10 - Natural Cork
18 - Colored Cork

Pg. 8

02

22 - D Series (digital)
24 - Wood
38 - Urban
40 - Fusion
42 - Stones

Pg. 22

03

48 - Product Information
49 - Warranty
52 - Technical Information

Pg. 48

DIVINA CORKOLEUM

04

52 - Corkoleum
58 - Natural Cork
64 - Colored Cork
68 - Technical Information
69 - Cork Roll Installation

Pg. 52

CORK MY WAY

05

70 - Cork May Way
72 - Natural Cork
74 - Cork Colored
76 - Technical Information

Pg. 70

06

79 - Under Flooring (Underlays)
79 - Cleaning & Maintenance
80 - Glue Down Installation
81 - Floating Installation
82 - About Sedacor

Pg. 78



DIVINA
cork floors





DIVINA

cork floors

Divina Cork Floors is a high-quality brand of cork floors recognized for its natural beauty, elegance and suitability for the widest variety of environments, from the most classical to the most contemporary.

It maximizes the benefits and ecological characteristics of cork, raising floors to a higher level of comfort and pleasure:

- Thermal comfort
- Comfort for the feet, back and legs
- Decreased stress on joints
- Anti-bacterial and hygienic product, excellent for people with allergies
- Easy to clean and maintain

Other features that make **Divina Cork Floors** great solutions for today's buildings:

- Natural and renewable
- Great thermal insulation, saving on energy costs
- Excellent sound insulation
- Resilient, returning to their original form after pressure
- Slip-resistant
- Anti-static
- Resistant to wear and impact

Divina Cork Floors is a Premium brand from **Sedacor- JPS Cork Group**, one of the world's largest cork producers, since 1924. Combining tradition and expertise with innovation and technology, the Group companies offer superior quality cork floors and cork products for architecture, construction and decoration.

Divina Cork Floors includes the Series **C, D, W, V** and **Corkoleum** (the first cork roll flooring).

Here you find the information about the Series **C, D** and **Corkoleum**.

- The **C** Series provides a wide selection of beautiful natural cork decoratives
- The **D** Series provides the versatility of digital printing, offering creative liberty and total customization of patterns
- The **Corkoleum** Series provides cork roll flooring versatility.

Structured on a cork base, which gives them the nobility and unique advantages of this raw material, **Divina Cork Floors** are produced in a range of visuals and patterns that offer beauty to spaces and provide the essential diversity to the best decoration projects.

Our **Divina Cork floating floors** are the perfect solution to quickly install your cork floor, even over a pre-existing floor. With a cork base structure, **Divina Cork Floors Floating** range provides superior thermal and acoustic insulation, not requiring the use of underlays.

Divina Cork Floors, in **glued down** version are the answer for those seeking a natural, cozy and comfortable appearance for long-term use. With possibilities in compact cork, with visuals in varied granule dimensions, or with a cork fantasy veneer, these floors are an expression of serenity and harmony.


FF

UNICLIC®

Floating Floors


C CORK SERIES

1235X300X11mm

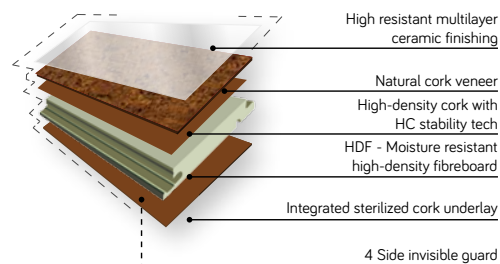

D DIGITAL SERIES

wood visuals
1235X190X11mm
stone / leather visuals
605X445X11mm

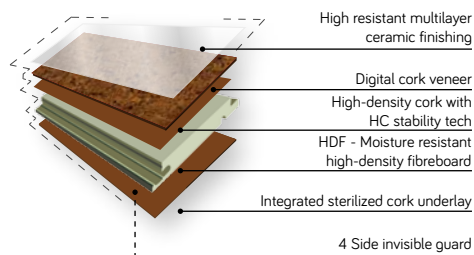


GDF

Glue Down Floors


C CORK SERIES

300X300X6mm
600X300X6mm
600X450X6mm

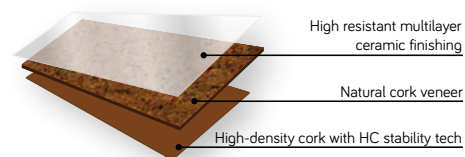


D DIGITAL SERIES

600X450X6mm

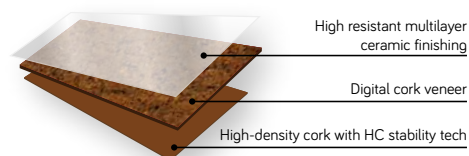

DIVINA CORKoleum

5500X1400X3mm



01







- 08 - C Series
- 10 - Natural Cork
- 18 - Colored Cork

Resulting from the originality of nature and human ingenuity, you can find a varied set of visuals for glued down and floating floors, which will stand out in any decor.

Combining the texture of cork with the creativity of color.

Floor coverings that fit in any environment, from classic to modern.


C CORK SERIES

 NATURAL NOISE ABSORBER	 CONFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC



GDF Glue Down Floors

- 300X300X6mm
- 600X300X6mm
- 600X450X6mm

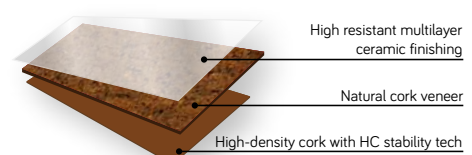




DIVINA
cork floors



Agate

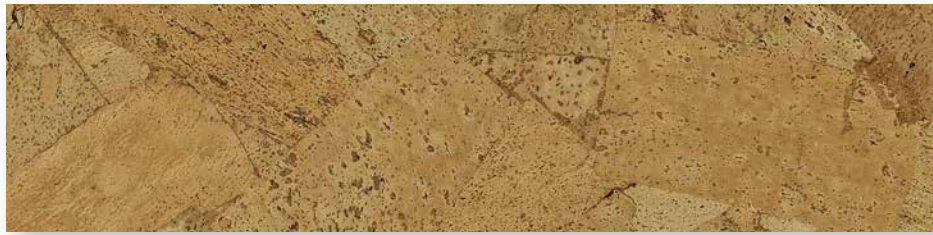


Amber



Amethyst



Aquamarine

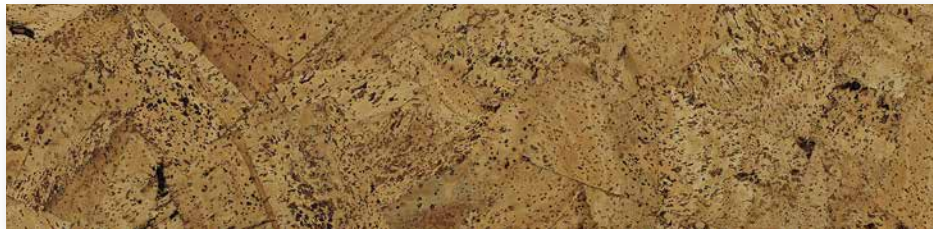

Diamond



FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm

NATURAL NOISE
ABSORBER

CONFORTABLE

RESISTANT
AND DURABLE

EASY TO INSTALL
AND MAINTAIN

THERMAL
INSULATION

ANTI-BACTERIAL
AND HYGIENIC



AMBER



Bloodstone



Coral



Beryl



Lapis Lazuli



Opal

UNICLIC

FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm

NATURAL NOISE
ABSORBER

CONFORTABLE

RESISTANT
AND DURABLE

EASY TO INSTALL
AND MAINTAIN

THERMAL
INSULATION

ANTI-BACTERIAL
AND HYGIENIC



OPAL



Obsidian



Onyx



Moonstone



Pyrite



Quartz

UNICLIC

FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm









QUARTZ

UNICLIC

FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm

	NATURAL NOISE ABSORBER		COMFORTABLE
	EASY TO INSTALL AND MAINTAIN		THERMAL INSULATION
	RESISTANT AND DURABLE		ANTI-BACTERIAL AND HYGIENIC



Sapphire



Serpentine



Jade



Ruby



Tanzanite

UNICLIC

FF - FLOATING FLOORS
1235X300X11mm


GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm



Titanite



Topaz

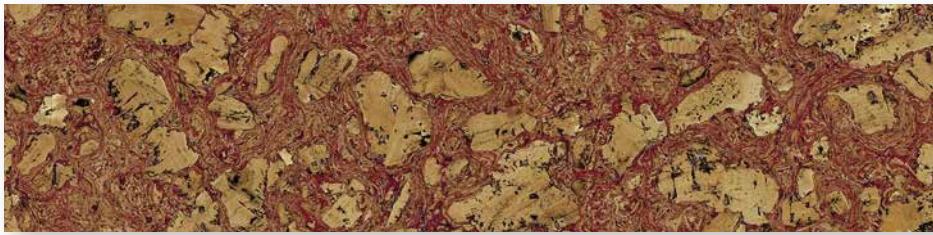

Turquoise

UNICLIC

FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm

opal

Pearl



Cream



Brown



quartz

Pearl



Cream









Brown



FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm

 <p>NATURAL NOISE ABSORBER</p>	 <p>COMFORTABLE</p>	 <p>RESISTANT DURABLE</p>
 <p>EASY TO INSTALL AND MAINTAIN</p>	 <p>HEAT INSULATION</p>	 <p>ANTIBACTERIAL AND HYGIENIC</p>



OPAL BROWN

onyx

Pearl



Cream









Brown




UNICLIC

FF - FLOATING FLOORS
1235X300X11mm

GDF - GLUE DOWN FLOORS
300X300X6mm
600X300X6mm
600X450X6mm

 <p>NATURAL NOISE ABSORBER</p>	 <p>COMFORTABLE</p>	 <p>RESISTANT ET DURABLE</p>
 <p>EASY TO INSTALL AND MAINTAIN</p>	 <p>PERMANENT INSULATION</p>	 <p>ANTIBACTERIAL AND HYGIENIC</p>

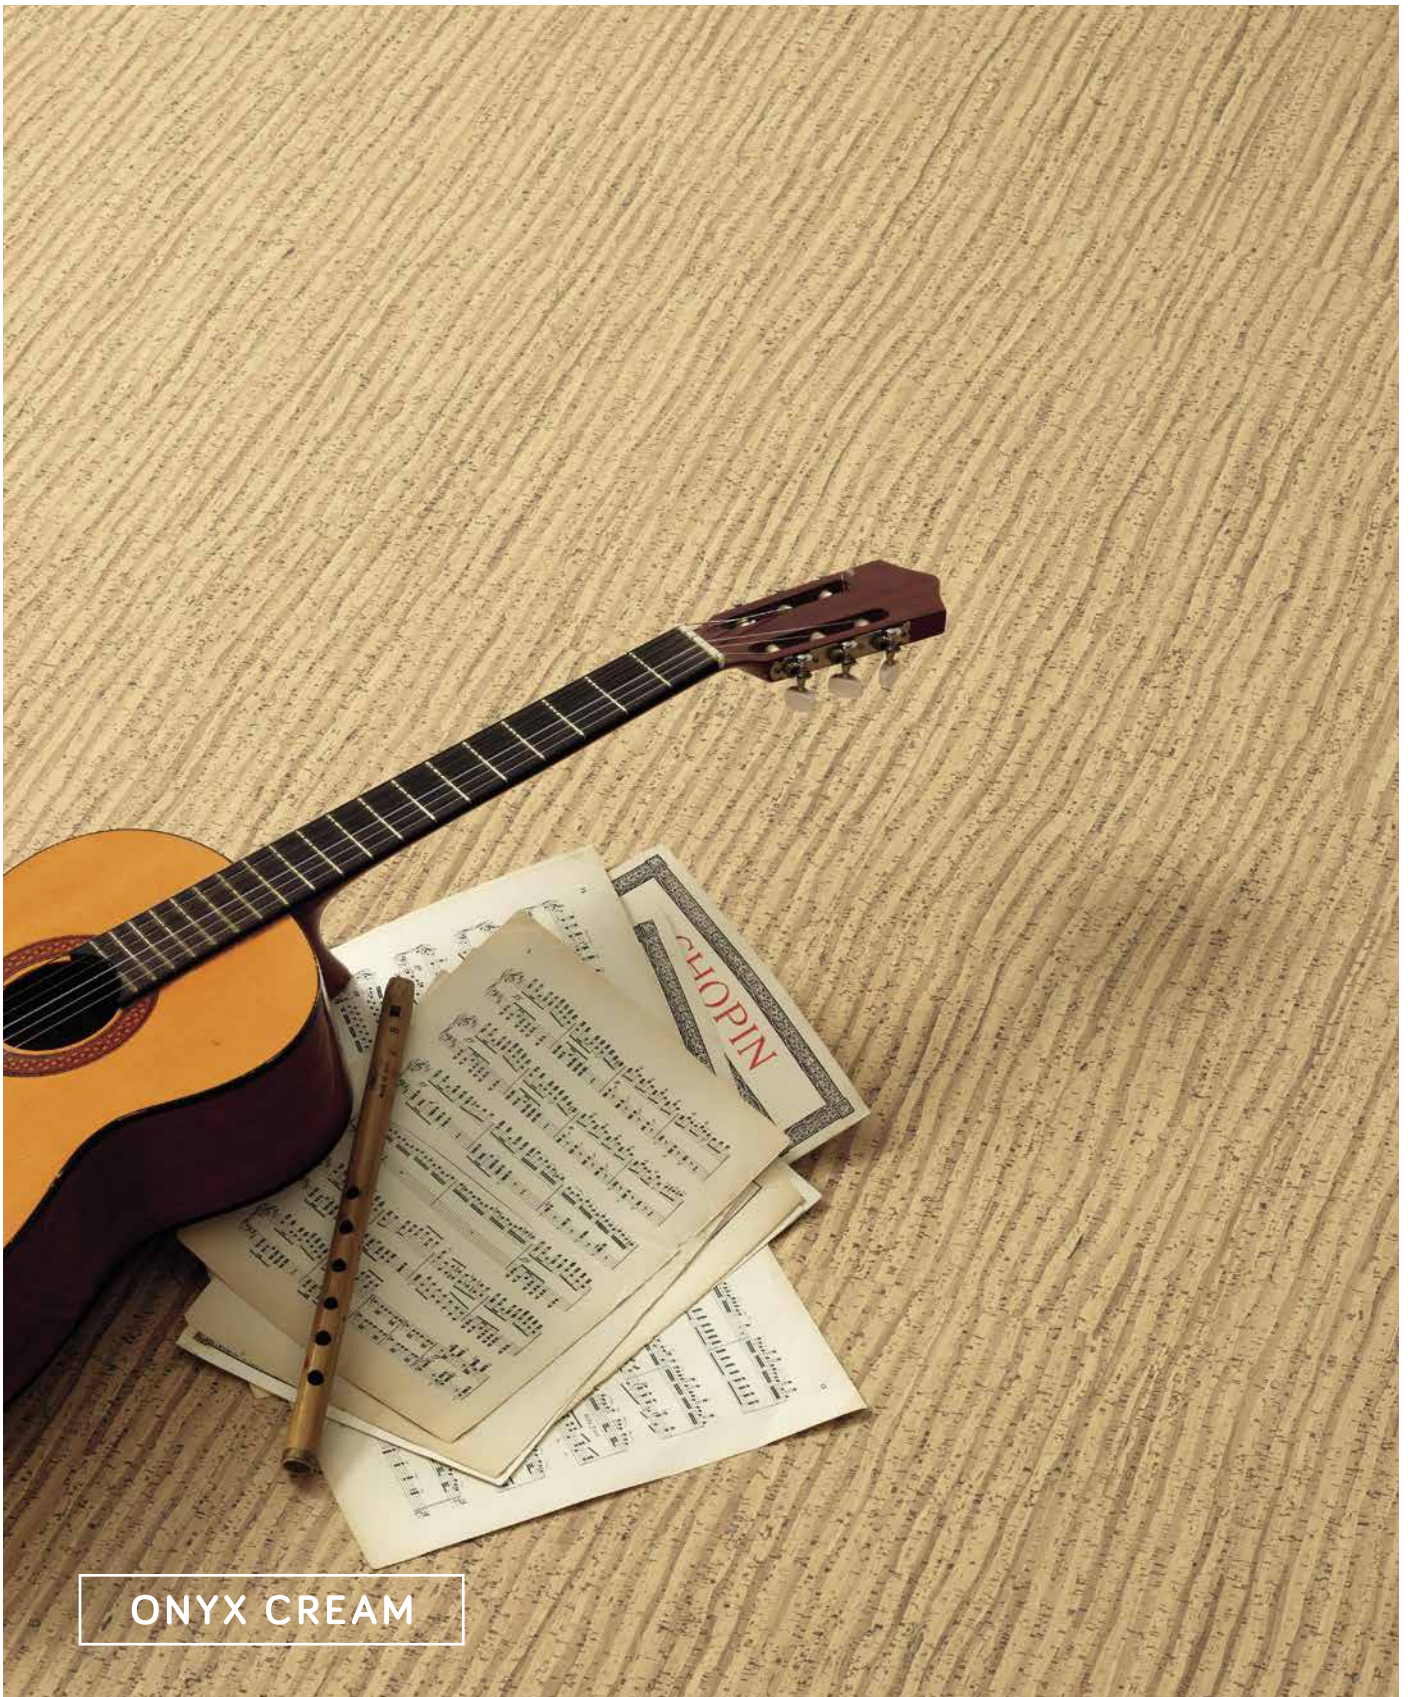







ONYX CREAM

02

- 22 - D Series (digital)
- 24 - Wood
- 38 - Urban
- 40 - Fusion
- 42 - Stones

Great creative liberty and customization is what Divina Cork Floors D Series offer. With a cork structural base that provides unique comfort and soundproofing, in floating or glued versions, the D Series also offer tailored customisation.

The creativity of the decorator finds the right answer in this flooring solution. It allows creating original visuals from a brand new and complex pattern, to reproducing a photo or simply integrating a logo over an existing pattern. Full originality in every type of environment!


 NATURAL NOISE ABSORBER	 CONFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC

D DIGITAL SERIES

FF Floating Floors ^{UNIGLIC®}


wood visuals
1235X190X11mm

stone / leather visuals
605X445X11mm

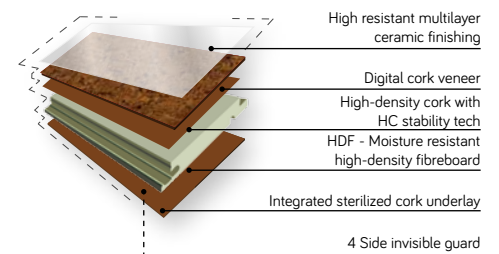

GDF Glue Down Floors

600X450X6mm

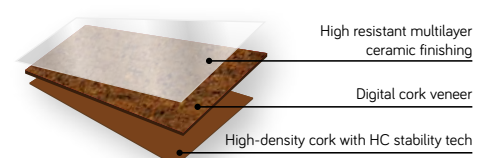









EUROPEAN OAK

UNICLIC

FF - FLOATING FLOORS

1235X190X11mm

 NATURAL NOISE ABSORBER	 COMFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC



European Oak









Rose Oak



Green Oak



Red Oak

 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



GREEN OAK



Linden Brown



Linden Dark Beige



Linden Grey









LINDEN BROWN

UNICLIC

FF - FLOATING FLOORS

1235X190X11mm

- | | |
|--|---|
|  NATURAL NOISE ABSORBER |  COMFORTABLE |
|  EASY TO INSTALL AND MAINTAIN |  THERMAL INSULATION |
|  RESISTANT AND DURABLE |  ANTI-BACTERIAL AND HYGIENIC |









Thyme Dark



Thyme Brown









Thyme Old

 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



THYME DARK







 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



Doussie



DOUSSIE







 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



Bamboo



BAMBOO







 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



Palissandro



PALISSANDRO

 <p>NATURAL NOISE ABSORBER</p>	 <p>CONFORTABLE</p>	 <p>RESISTANT AND DURABLE</p>
 <p>EASY TO INSTALL AND MAINTAIN</p>	 <p>THERMAL INSULATION</p>	 <p>ANTI-BACTERIAL AND HYGIENIC</p>



Pao Rosa



PAO ROSA




Maple



Cherry



Steamed Beech

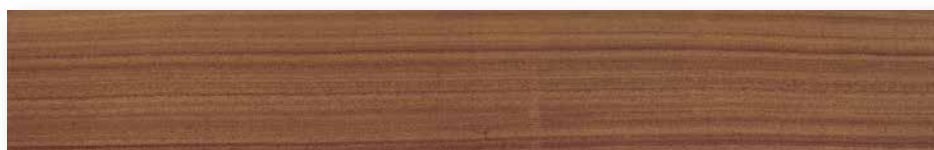

Mahogany



Sucupira









Walnut



SUCUPIRA

UNICLIC
FF - FLOATING FLOORS
1235X190X11mm


- | | |
|--|---|
|  NATURAL NOISE ABSORBER |  CONFORTABLE |
|  EASY TO INSTALL AND MAINTAIN |  THERMAL INSULATION |
|  RESISTANT AND DURABLE |  ANTI-BACTERIAL AND HYGIENIC |



Wengé



Teak

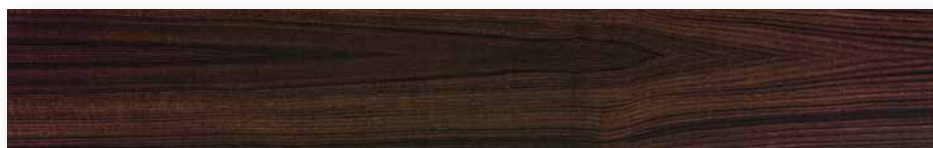

Teak Brown



Zebrano



Zebrano White










WENGÉ

UNICLIC

FF - FLOATING FLOORS

1235X190X11mm

 NATURAL NOISE ABSORBER	 CONFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC

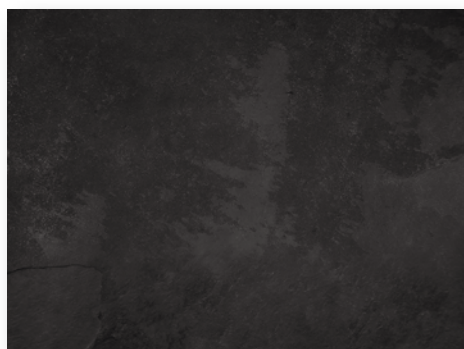

Urban Glamour Black



Urban Glamour Grey









Urban Glamour Terra Cotta

UNICLIC

FF - FLOATING FLOORS
605X445X11mm

GDF - GLUE DOWN FLOORS
600X450X6mm

 NATURAL NOISE ABSORBER	 COMFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC




URBAN GLAMOUR GREY



Fusion Caramel



Fusion Chocolate

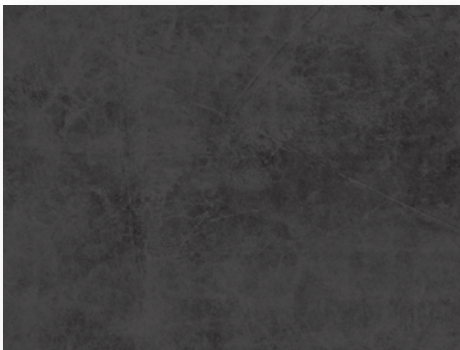







Fusion Charcoal

UNICLIC

FF - FLOATING FLOORS
605X445X11mm

GDF - GLUE DOWN FLOORS
600X450X6mm

 <p>NATURAL NOISE ABSORBER</p>	 <p>CONFORTABLE</p>	 <p>RESISTANT AND DURABLE</p>
 <p>EASY TO INSTALL AND MAINTAIN</p>	 <p>THERMAL INSULATION</p>	 <p>ANTI-BACTERIAL AND HYGIENIC</p>



FUSION CHOCOLATE



Travertino Classic



Fiori di Pesco



Travertino Yellow Gold



Travertino Serrado



Travertino Yellow



FF - FLOATING FLOORS
605X445X11mm

GDF - GLUE DOWN FLOORS
600X450X6mm









FIORI DI PESCO

UNICLIC

FF- FLOATING FLOORS
605X445X11mm

GDF- GLUE DOWN FLOORS
600X450X6mm

	NATURAL NOISE ABSORBER		COMFORTABLE
	EASY TO INSTALL AND MAINTAIN		THERMAL INSULATION
	RESISTANT AND DURABLE		ANTI-BACTERIAL AND HYGIENIC



Blue Macaubas



Black Armani



Forest Brown



Aquamarine









Mouro Brown


UNICLIC

FF - FLOATING FLOORS
605X445X11mm

GDF - GLUE DOWN FLOORS
600X450X6mm

 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



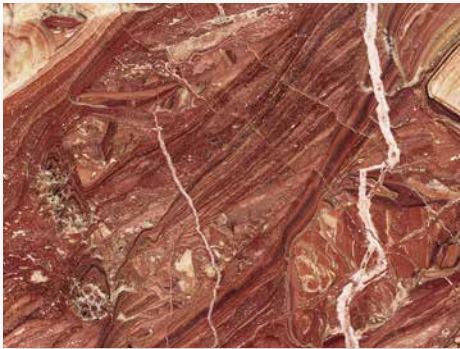

Oniz Rojo Iris



Sodalite Green



Yellow Negrais









Carrara Estatuário

UNICLIC

FF - FLOATING FLOORS
605X445X11mm

GDF - GLUE DOWN FLOORS
600X450X6mm

 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC



CARRARA ESTATUÁRIO

03

- 48 - Product Information
- 49 - Warranty
- 52 - Technical Information



Product Information

WARRANTY

The name Divina Cork Floors is synonymous with quality cork flooring, thanks to the great attention paid to quality control as well as research and product development. The Divina Cork Floors Warranty ensures that products meet the standards determined by Divina Cork Floors, as well as the industrial quality standards specified for each product line.

DIVINA CORK FLOORS LIFETIME STRUCTURAL WARRANTY

When sold as new by authorised resellers, we guarantee the first end user that their Divina Cork Floors floor is free from defects in materials or workmanship throughout its lifetime.







This Divina Cork Floors Lifetime Structural Warranty is limited by the terms and conditions laid down in said Warranty. Please read the terms and conditions to find out full information and limitations of this Divina Cork Floors Warranty.

DIVINA CORK FLOORS LIFETIME WARRANTY FOR THE INTEGRITY OF JOINTS (Floating floors)

We guarantee that the joints will remain secure and the Divina Cork Floors floating floor panels will not become separated.

ADDITIONAL DIVINA CORK FLOORS WARRANTY AGAINST WEAR

As manufacturer of Divina Cork Floors branded products, we guarantee the end consumer that the use layer of this floor will remain in good condition for at least the years from the date of billing the original end user (see table). If, however, any part of the floor becomes worn during the different periods, we shall, at our sole discretion, repair or replace the part in question free of charge.

Structural/ Surface Wear Layer		AREA AND INTENSITY OF USE ACCORDING TO ISO 10874					
		DOMESTIC			COMMERCIAL		
							
Product Line	Finishing						
Divina Floating/ Glue-Down Series C, D or W	High Resistance Finishing	15 Years	15 Years	15 Years	5 Years	ND	ND
Divina Corkoleum	Sanded with Varnish on-site	10 Years (a)	10 Years (a)	10 Years (a)	5 Years (b)	ND	ND
Divina Floating Series V	0,50 mm	25 Years	25 Years	25 Years	15 Years	15 Years	15 Years



(a) On-site finishing with 1-2 coats of Bona Traffic HD or similar.

(b) On-site finishing with 2-3 coats of Bona Traffic HD or similar.







This is a summary of the Divina Cork Floors Warranty. To access the full version, please see the product packaging or download it at www.sedacor.com.



Technical Data

			Installation method
			Glued
			Series C
			Finish
			High resistant multilayer ceramic finishing
Level of Use	Standard	Unit	Specification
Domestic	EN ISO 10874	Class	 23
Commercial	EN ISO 10874	Class	 31
Testing - Level of use	Standard	Unit	Specification
			EN 12104
Dimensions	EN ISO 24342	mm	600x450 ± 0,20% 600x300 ± 0,20% 300x300 ± 0,20% máx:1,0 mm
		Inches	23-5/8x17-23/32 ± 0,20% 23-5/8x11-13/16 ± 0,20% 11-13/16x11-13/16 ± 0,20%
Overall thickness	EN ISO 24346	mm	6 ± 0,15
Squareness	EN ISO 24342	mm	<0,30
Straightness	EN ISO 24342	mm	<0,20
Apparent Density	EN ISO 23997/EN 672	Kg/m ³	≥ 450
Mass per Unit Area	EN ISO 23997	g/m ²	3000 ± 10%
Dimensional Stability (humidity)	EN 669	%	
Dimensional Stability after exposure to heat	EN ISO 23999	%	< 0,4
Thickness of top cork surface	EN ISO 24340	mm	
Openings between panels	EN 14085 (Annex B)		
	Average	mm	
	Individual values	mm	
Height difference between panels	EN 14085 (Annex B)		
	Average	mm	
	Individual values	mm	
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%	
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%	
Gloss	Gloss meter (60°)	° Gardner	12 ± 3°
Moisture Content	EN 12105	%	2,5-6
Curling after exposure to heat§	EN ISO 23999	mm	≤6
Safety Properties (EN 14041)	Standard-Test Method	Unit	Specification
Fire Resistance	EN 13501-1	Class	Dfls1
Slip Resistance	EN 13893	Class	DS
Formaldehyde Emission	DIN EN 717-1	Class	E1
Electrical Behaviour	EN 1815	kV	Not Antistatic
Content pentachlorophenol (PCP)	CEN TR 14823 (ihd-W 409)	mg/Kg	PCP Free
Additional Properties	Standard-Test Method	Unit	Specification
Impact Sound Reduction	ISO 140-8	dB	15
Thermal Resistance	EN 12667	(m ² .K)/W	≤0,150
Thermal Conductivity	EN 12667	W/m.K	≤0,100
Abrasion Resistance	EN 14354	Cycles	≥7000
Castor Chair	EN 425	Visual effect after 25.000 cycles	No change of the wear layer nor delamination
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a foot type 2
Residual Indentation	EN ISO 24343-1	mm	≤0,3
Stains Resistance	ISO 26987	Grade	Grade 0-unchanged
Light Fastness	ISO 105-B02	Blue wool scale	<4

Installation method

Installation method			
Glued		Floating	
Series D		Series C	Series D
Finish			
High resistant multilayer ceramic finishing		High resistant multilayer ceramic finishing	High resistant multilayer ceramic finishing
Specification	Specification	Specification	Specification
 23		 23	 23
 31		 31	 31
Specification	Specification	Specification	Specification
EN 12104	EN 12104 + EN 14085	EN 12104 + EN 14085	EN 12104 + EN 14085
600x450 ± 0,20% máx:1,0 mm	1235x300 ± 0,10% width máx:0,5 mm length máx:2,0 mm	1235x190 ± 0,10% (wood visuals) 605x445 ± 0,10% (stone visuals)	1235x190 ± 0,10% (wood visuals) 605x445 ± 0,10% (stone visuals)
23-5/8x17-23/32 ± 0,20%	48-10/16x11-13/16 ± 0,10%	48-10/16x7-8/16 ± 0,10% (wood visuals) 23-13/16x18-8/16 ± 0,10% (stone visuals)	48-10/16x7-8/16 ± 0,10% (wood visuals) 23-13/16x18-8/16 ± 0,10% (stone visuals)
6 ± 0,15	11 ± 0,15	11 ± 0,15	11 ± 0,15
<0,30	<0,30	<0,30	<0,30
<0,20	<0,20	<0,20	<0,20
≥ 450	≥ 700	≥ 700	≥ 700
3200 ± 10%	8500 ± 13%	8500 ± 13%	8700 ± 13%
< 0,4	< 5	< 5	< 5
	≥ 3,0	≥ 3,0	≥ 3,0
	≤0,15	≤0,15	≤0,15
	≤0,2	≤0,2	≤0,2
	≤0,15	≤0,15	≤0,15
	≤0,2	≤0,2	≤0,2
	≤0,5/≤1,0	≤0,5/≤1,0	≤0,5/≤1,0
	≤0,5/≤1,0	≤0,5/≤1,0	≤0,5/≤1,0
25 ± 3° (stone visuals)	12 ± 3°	6 ± 3° (wood visuals) 25 ± 3° (stone visuals)	6 ± 3° (wood visuals) 25 ± 3° (stone visuals)
2,5-6			
≤6			
Specification	Specification	Specification	Specification
Dfs1	Cfs1	Cfs1	Cfs1
DS	DS	DS	DS
E1	E1	E1	E1
Not Antistatic	Not Antistatic	Not Antistatic	Not Antistatic
PCP Free	PCP Free	PCP Free	PCP Free
Specification	Specification	Specification	Specification
15	17	17	17
≤0,150	≤0,150	≤0,150	≤0,150
≤0,100	≤0,100	≤0,100	≤0,100
≥7000	≥7000	≥7000	≥7000
No change of the wear layer nor delamination	No change of the wear layer nor delamination	No change of the wear layer nor delamination	No change of the wear layer nor delamination
No damage shall be visible after testing with a foot type 2	No damage shall be visible after testing with a foot type 2	No damage shall be visible after testing with a foot type 2	No damage shall be visible after testing with a foot type 2
≤0,3	≤0,3	≤0,3	≤0,3
Grade 0-unchanged	Grade 0-unchanged	Grade 0-unchanged	Grade 0-unchanged
≥6	<4	≥6	≥6

04

- 52 - Corkoleum
- 58 - Natural Cork
- 64 - Colored Cork
- 68 - Technical Information
- 69 - Cork Roll Installation

Divina Corkoleum takes the best of cork and eases its use in flooring.


Inspired by lifestyles rapidly changing, with intense rhythms, where awareness about sustainability, recovery and renovation of space, comfort, design and technology meet and articulate in an extraordinary symbiosis.

For the first time is presented to the world a **cork roll flooring**.

DIVINA
CORKoleum

Cork Roll Flooring


5500X1400X3mm

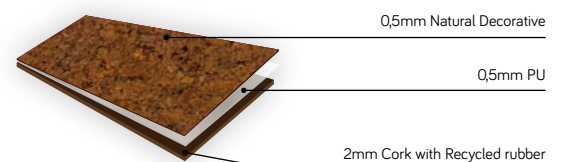



DIVINA
CORKOLEUM
Cork Roll Flooring 

DIVINA CORKOLEUM

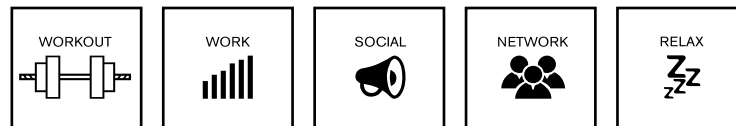

Cork, a natural and recyclable raw material extracted from the cork oak trees without ever harming the normal development of the species and without damaging the tree, having unique features that no other material could copy.

An extraordinary material for flooring.

The first Cork Roll Flooring is natural, comfortable ecological, sustainable, durable, of easy and quick application, ideal for decoration and renovation of spaces where comfort, reduction and absorption of impact noise are important, such as living rooms, bedrooms, bathrooms, kitchens, libraries, physiotherapy rooms, gyms, and other spaces for a comfortable and balanced environment.

Sedacor reinvents cork flooring with this new product concept, providing an experience of comfort and pleasure of living, for the most diverse life styles.

Divina Corkoleum

The new concept of cork flooring



IN HARMONY WITH NATURE



Natural



Silent



Pleasant to touch



Acoustic insulation



Thermal insulation



Hypoallergenic



Waterproof



Cork flooring in roll



Quick and easy to install



Less joints



Low thickness:
3mm



Ideal for renovation of spaces



Absorption of muscle tension
and the impact when walking



Resilient, strong and durable



Diversified designs



CORK FLOORING
IN ROLL




NATURAL



PLEASANT TO
TOUCH/TAIN



THERMAL
INSULATION

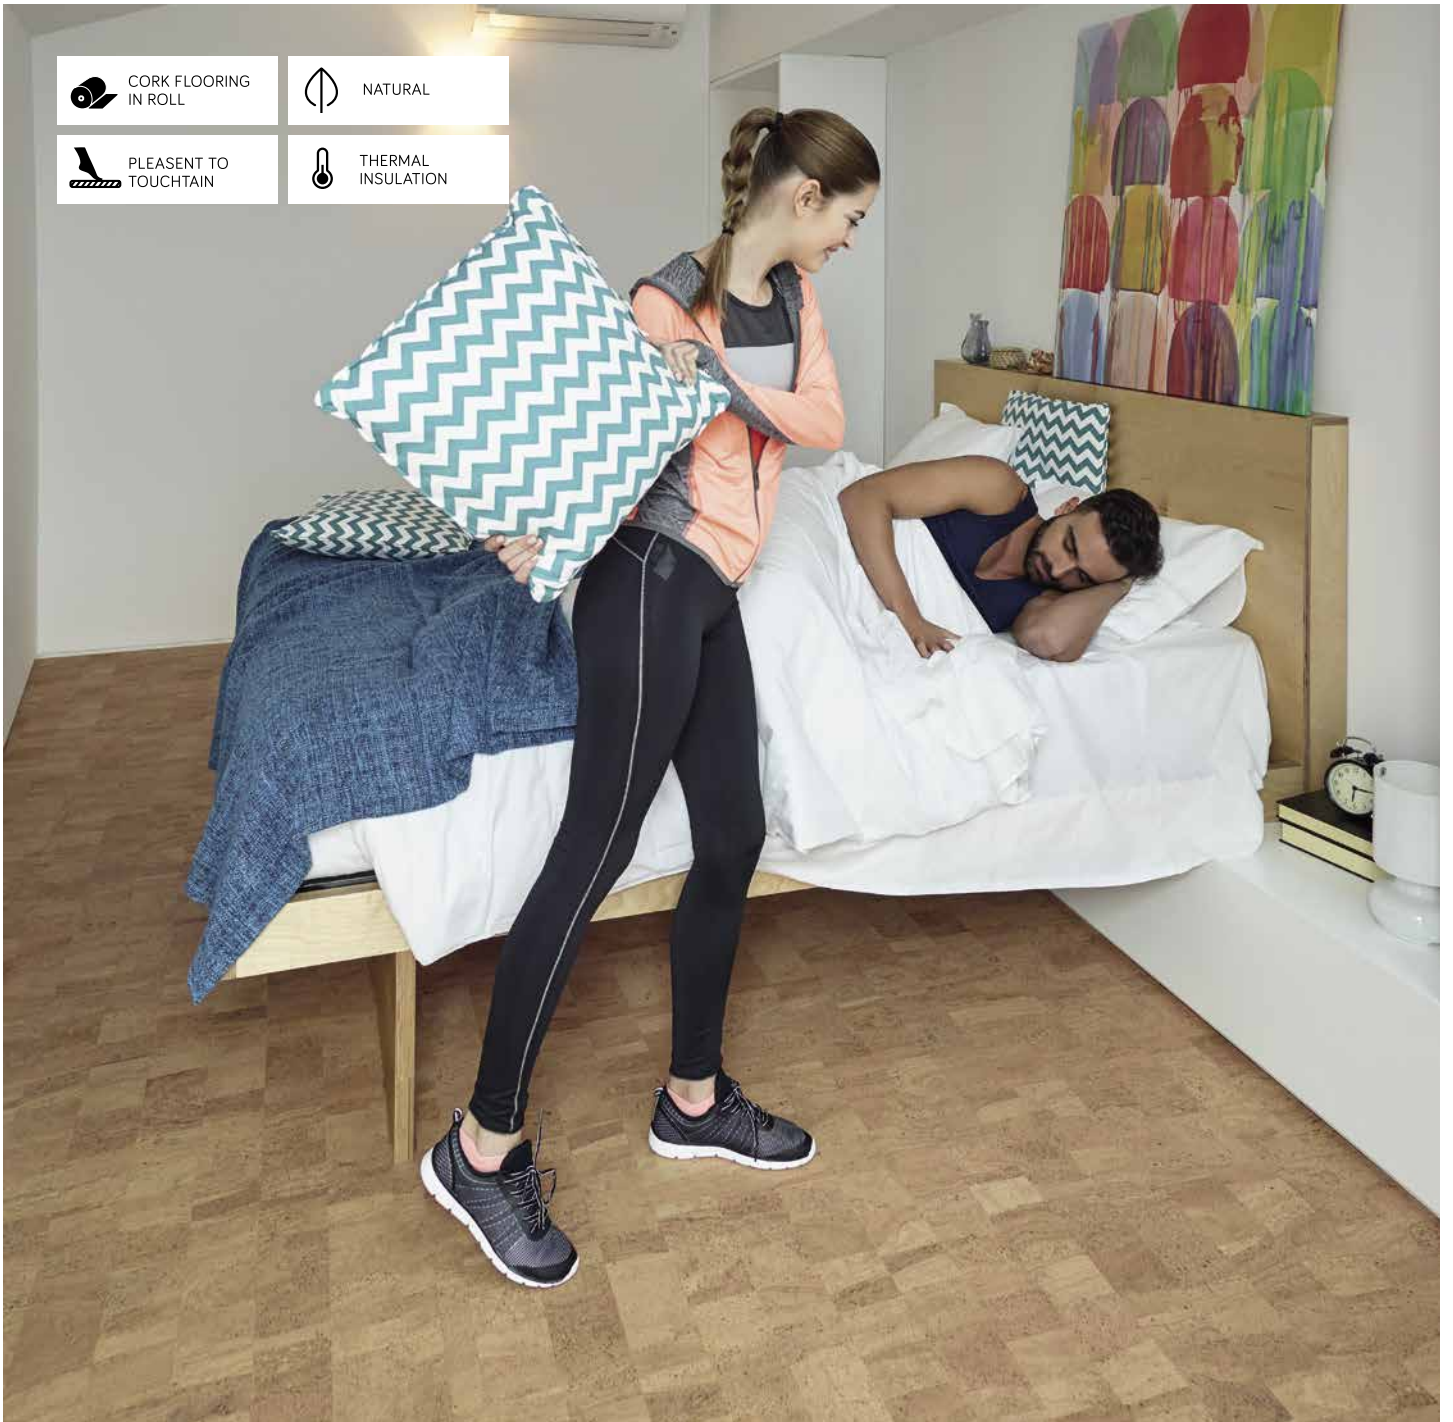

WATERPROOF





QUICK AND EASY
TO INSTALL



IDEAL FOR
RENOVATION
OF SPACES




DIVERSIFIED
DESIGNS



SILENT



LOW THICKNESS:
3MM

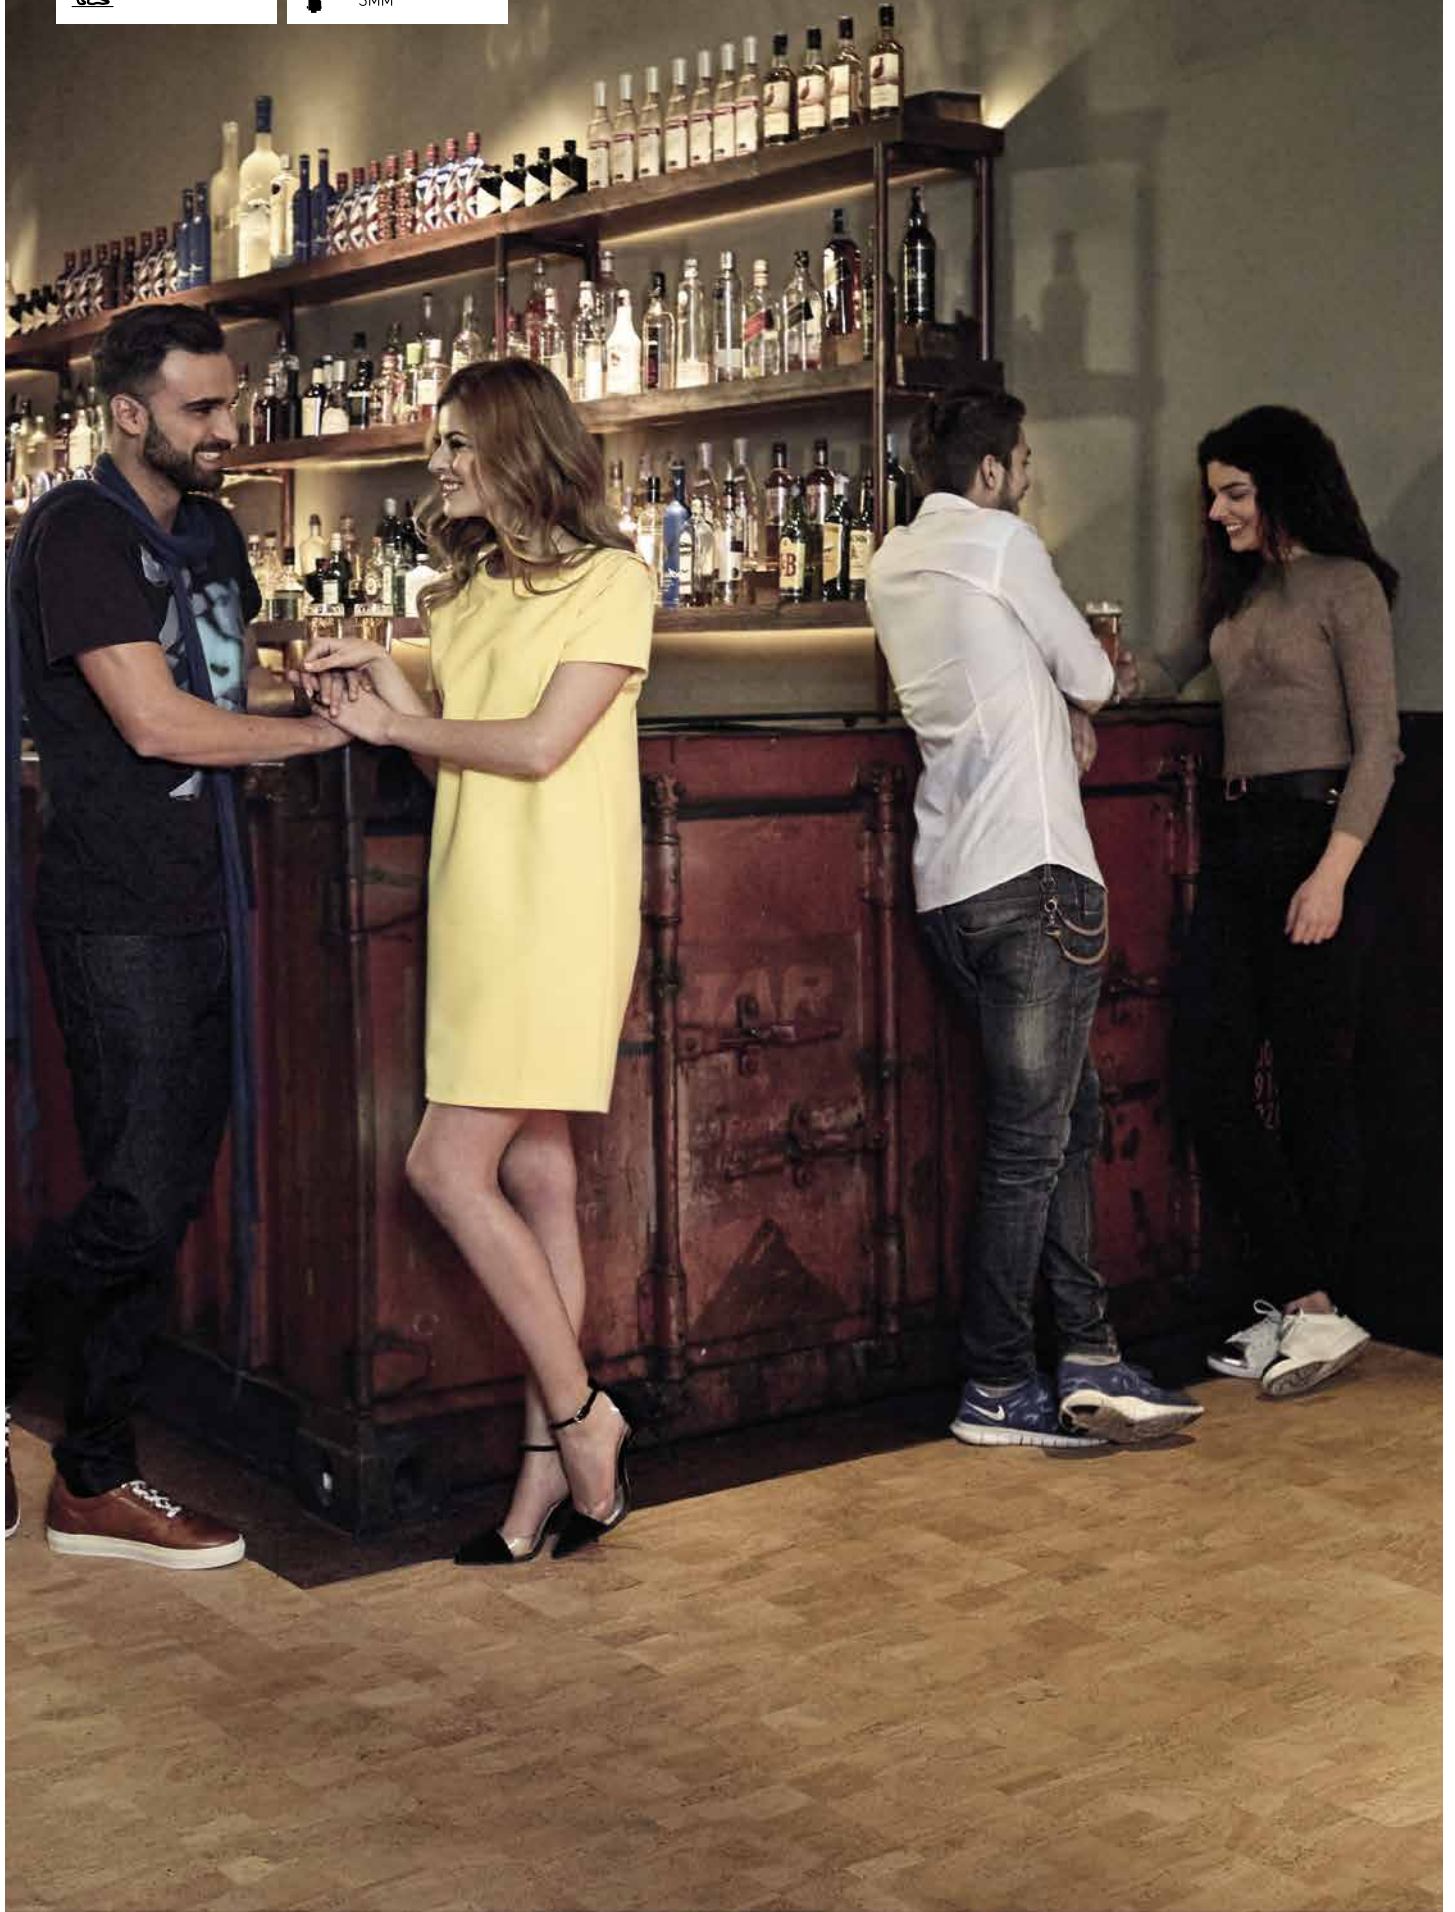




DECORATIVE - NATURALS



Acorn

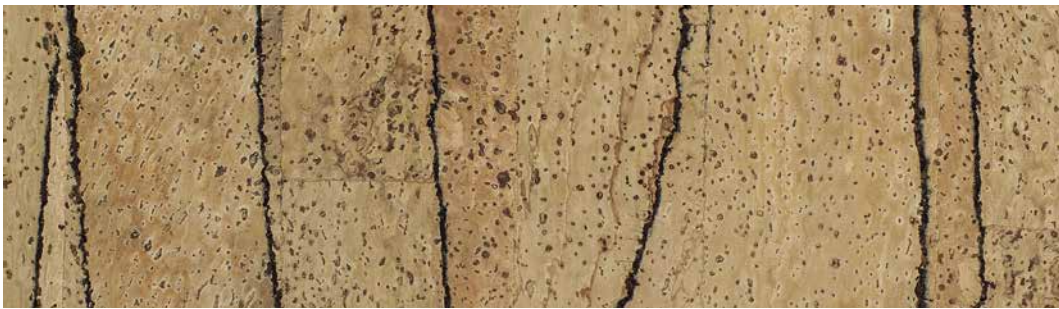

Fig



Apple



Lemon

IN ROLL
5500X1400X3mm
Others dimentionis by request



DECORATIVE - NATURALS



Pear





DECORATIVE - NATURALS



Neo



Lime




Trinity



Grit



DECORATIVE - NATURALS

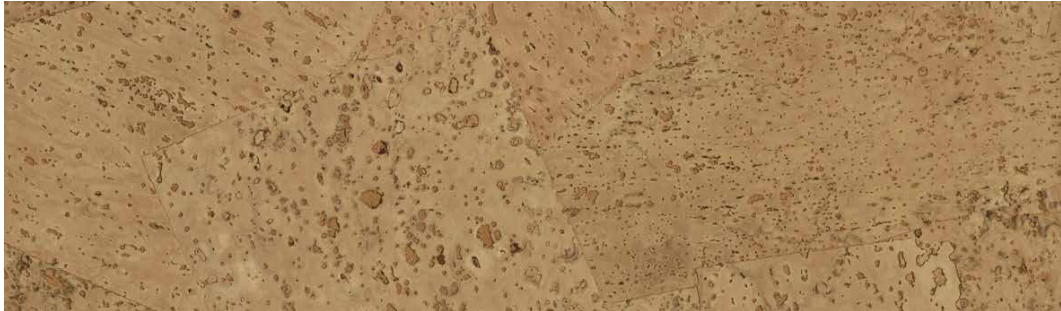

Mango



Morpheus



Oracle



Gravel





PORT

concept 2

ROGUE

8

14

ROGUE



DECORATIVE - NATURAL COLORED



Lemon Grey

1W



Grit Grey

1W



Lemon Black

100 P




Grit Black

100 P



DECORATIVE - NATURAL COLORED

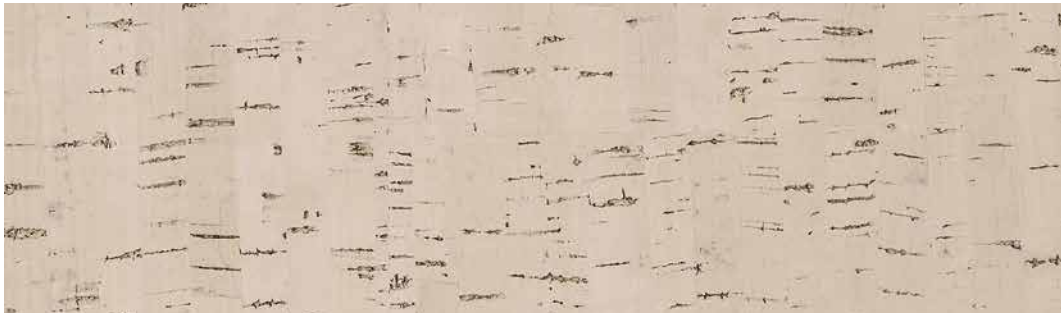


Lemon Rose

2 W



Grit Rose

2 W

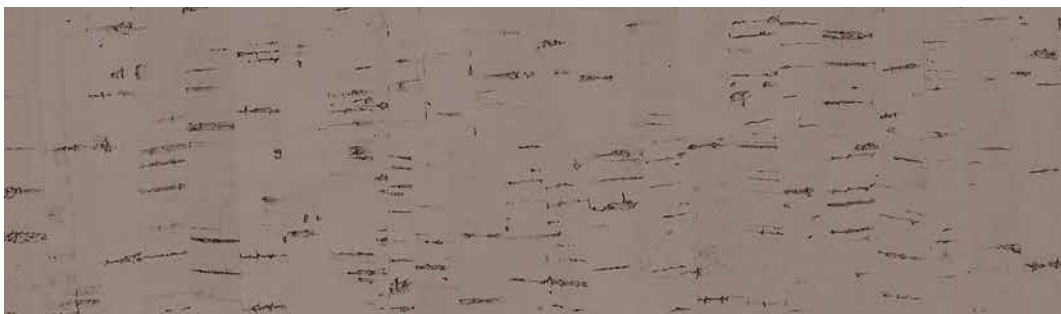

Lemon Salmon

3 W



Grit Salmon

3 W

IN ROLL
5500X1400X3mm
Others dimentions by request

These colors are merely indicative
and may vary slightly with the base of
natural cork.
Other colors and textures by request.



DECORATIVE - NATURAL COLORED




Lemon Brown

10 G




Grit Brown

10 G

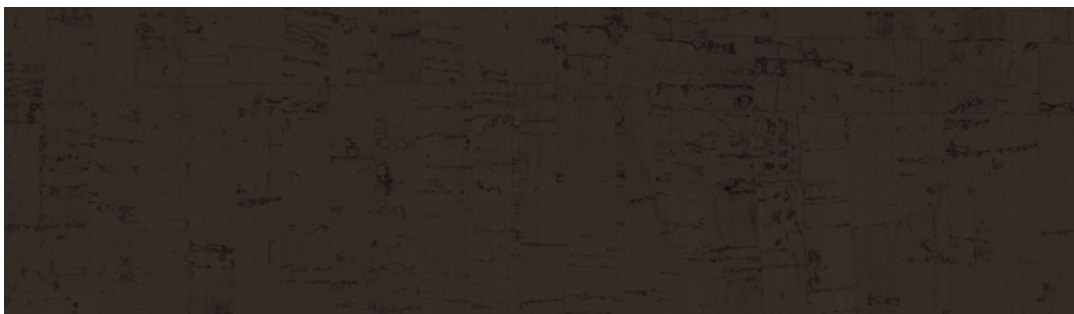

Lemon Dark Brown

14 G

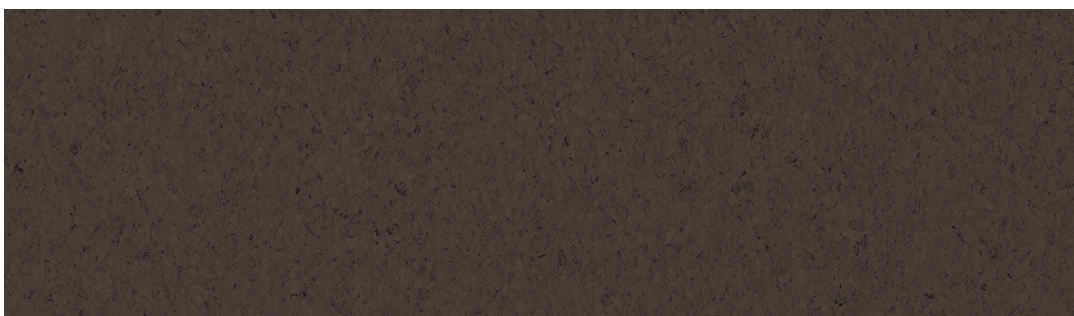

Grit Dark Brown

14 G




DECORATIVE - NATURAL COLORED



Lemon Green

3 P

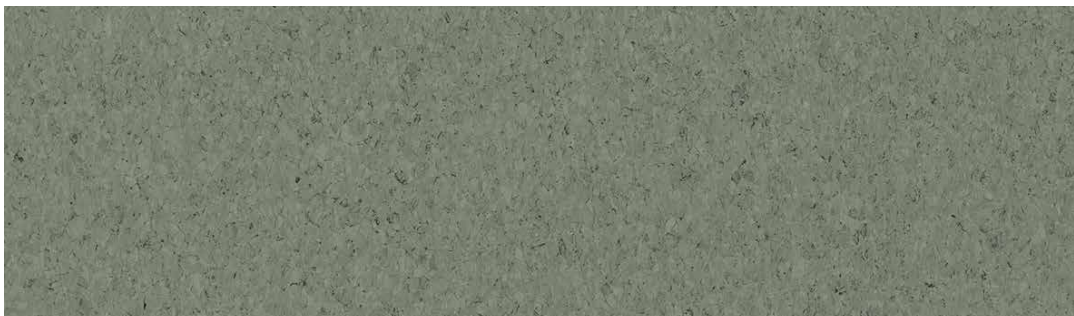

Grit Green

3 P



Lemon Blue

26 R



Grit Blue



26 R

IN ROLL
5500X1400X3mm
Others dimentions by request

These colors are merely indicative
and may vary slightly with the base of
natural cork.
Other colors and textures by request.



TECHNICAL SPECIFICATIONS

Level of use	Standard	Unit	
Domestic	EN ISO 10874	Classe	 (a)
Commercial			 (b)

General Properties (EN 12104)

Roll width	EN ISO 24341	mm	1400 (other widths under request)
Roll length	EN ISO 24341	m	≥5,5 (other lengths under request)
Thickness	EN ISO 24346	mm	3 ± 0,3
Mass per unit area	EN 430	g/m ²	1650 ± 150
Apparent Density	EN 672	Kg/m ³	500 ± 50
Dimensional Stability	EN ISO 23999	%	< 0,2
Flexibility	EN ISO 24344	mm	Ø10
Moisture content	EN 12105	%	2,5 - 6
Curling	EN ISO 23999	mm	≤ 6
Hardness	ISO 7619	Shore A	60

Safety Properties (EN 14041)

Reaction to fire	EN 13501-1	Class	Cfs1 (without varnish)
Formaldehyde Emission	DIN EN 717-1	Class	E1 (no added formaldehyde)
PCP Content	CEN TR 14823 (ihd-W 409)	mg/kg	PCP free
Static Electrical Charge	EN 1815	kV	Antistatic

Supplementary Properties

Impact sound reduction	ISO 10140-3	dB	17
Residual indentation	EN ISO 24343-1	mm	≤0,30
Thermal Resistance	EN 12667	m ² .k/W	0,0413 (c)
Thermal Conductivity	EN 12667	W/m.K	0,0703
Light fastness	ISO 105-B02	Scale	<4 Colorless natural colors >6 Dark colors


(a) On-site finishing with 1-2 coats of Bona Traffic HD or similar

(b) On-site finishing with 2-3 coats of Bona Traffic HD or similar

(c) Suitable for floor heating systems according to "German Federal Association Radiant Panel Heating"

Note: Technical specifications may be changed without previous notice

COMPOSITION:

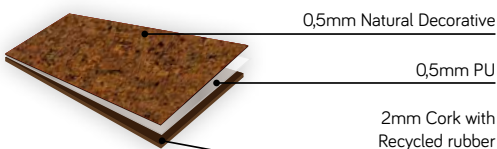



INSTALLATION INSTRUCTIONS



1. Ideal installation conditions:

The sub floor must be well leveled.

The sub floor must be cleaned of dust, grease, paint or other materials that reduce the stickiness of adhesives to use

2. Necessary tools

snap-off knife, pencil, measuring tape, ruler, paint roller, paint tray, bucket




3. Atmosphere conditions of Storage and Installation

Temperature between 15°C and 25°C (59°F to 77°F)

Humidity/ moisture between 45% and 65%

Store rolls vertically on-site 48 hours prior to installation




4. Unroll the rolls

After unrolling, wait a few minutes until cork returns to its flat shape



5. Make a marking with a pencil on the Sub-floor



6. Gluing

Lift half the roll length and apply glue, approximately 300g / m²

Glue the Corkoleum roll where it has already glue after ± 20 minutes

Lift the unglued Corkoleum roll and apply Glue


Glue the Corkoleum roll after ± 20 minutes

Use your hands to remove all air bubbles that can appear during bonding

6.1. Gluing Scheme



7. Clean all installation waste



8. Finishing

A finish coating should be applied 24 hours after floor instalation

Apply varnish according to manufacturer's instructions

8.1. Finishing application Scheme

Apply the varnish crosswise (one horizontally and one vertically) thus, the second pass will cover any failure of the first pass

1st PASS 2nd PASS



05

- 70 - Cork May Way
- 72 - Natural Cork
- 74 - Cork Colored
- 76 - Technical Information

The range of easy application flooring and excellent cost / benefit.


Natural product, ecological and sustainable.



CORK MY WAY


comfort and easy floors



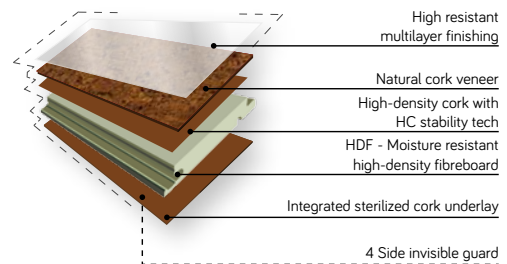



UNICLIC® FF Floating Floors 1235X300X11mm

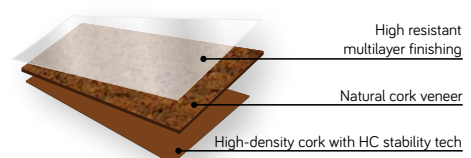

GDF Glue Down Floors

300X300X6mm
600X300X6mm
600X450X6mm



 NATURAL NOISE ABSORBER	 CONFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC









HARE

UNICLIC

FF - FLOATING FLOORS
915X300X10,5mm

GDF - GLUE DOWN FLOORS
300X300X4mm
600X300X4mm
600X450X4mm

 NATURAL NOISE ABSORBER	 COMFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC



Antelope



Kangaroo



Horse

UNICLIC

FF - Floating floors
915X300X10,5mm

GDF - Glue down floors
300X300X4mm
600X300X4mm
600X450X4mm









LION

UNICLIC

FF - FLOATING FLOORS
915X300X10,5mm

GDF - GLUE DOWN FLOORS
300X300X4mm
600X300X4mm
600X450X4mm

 NATURAL NOISE ABSORBER	 CONFORTABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION
 RESISTANT AND DURABLE	 ANTI-BACTERIAL AND HYGIENIC



Coyote




Gazelle



Elephant



Hare

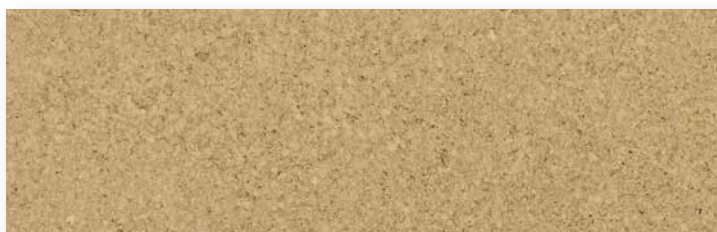








Lion

UNICLIC


FF - Floating floors
915X300X10,5mm

GDF - Glue down floors
300X300X4mm
600X300X4mm
600X450X4mm

 NATURAL NOISE ABSORBER	 CONFORTABLE	 RESISTANT AND DURABLE
 EASY TO INSTALL AND MAINTAIN	 THERMAL INSULATION	 ANTI-BACTERIAL AND HYGIENIC

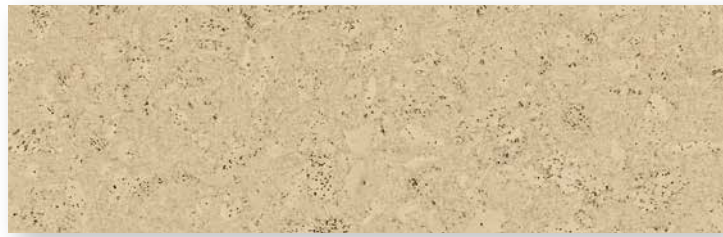

Gnu

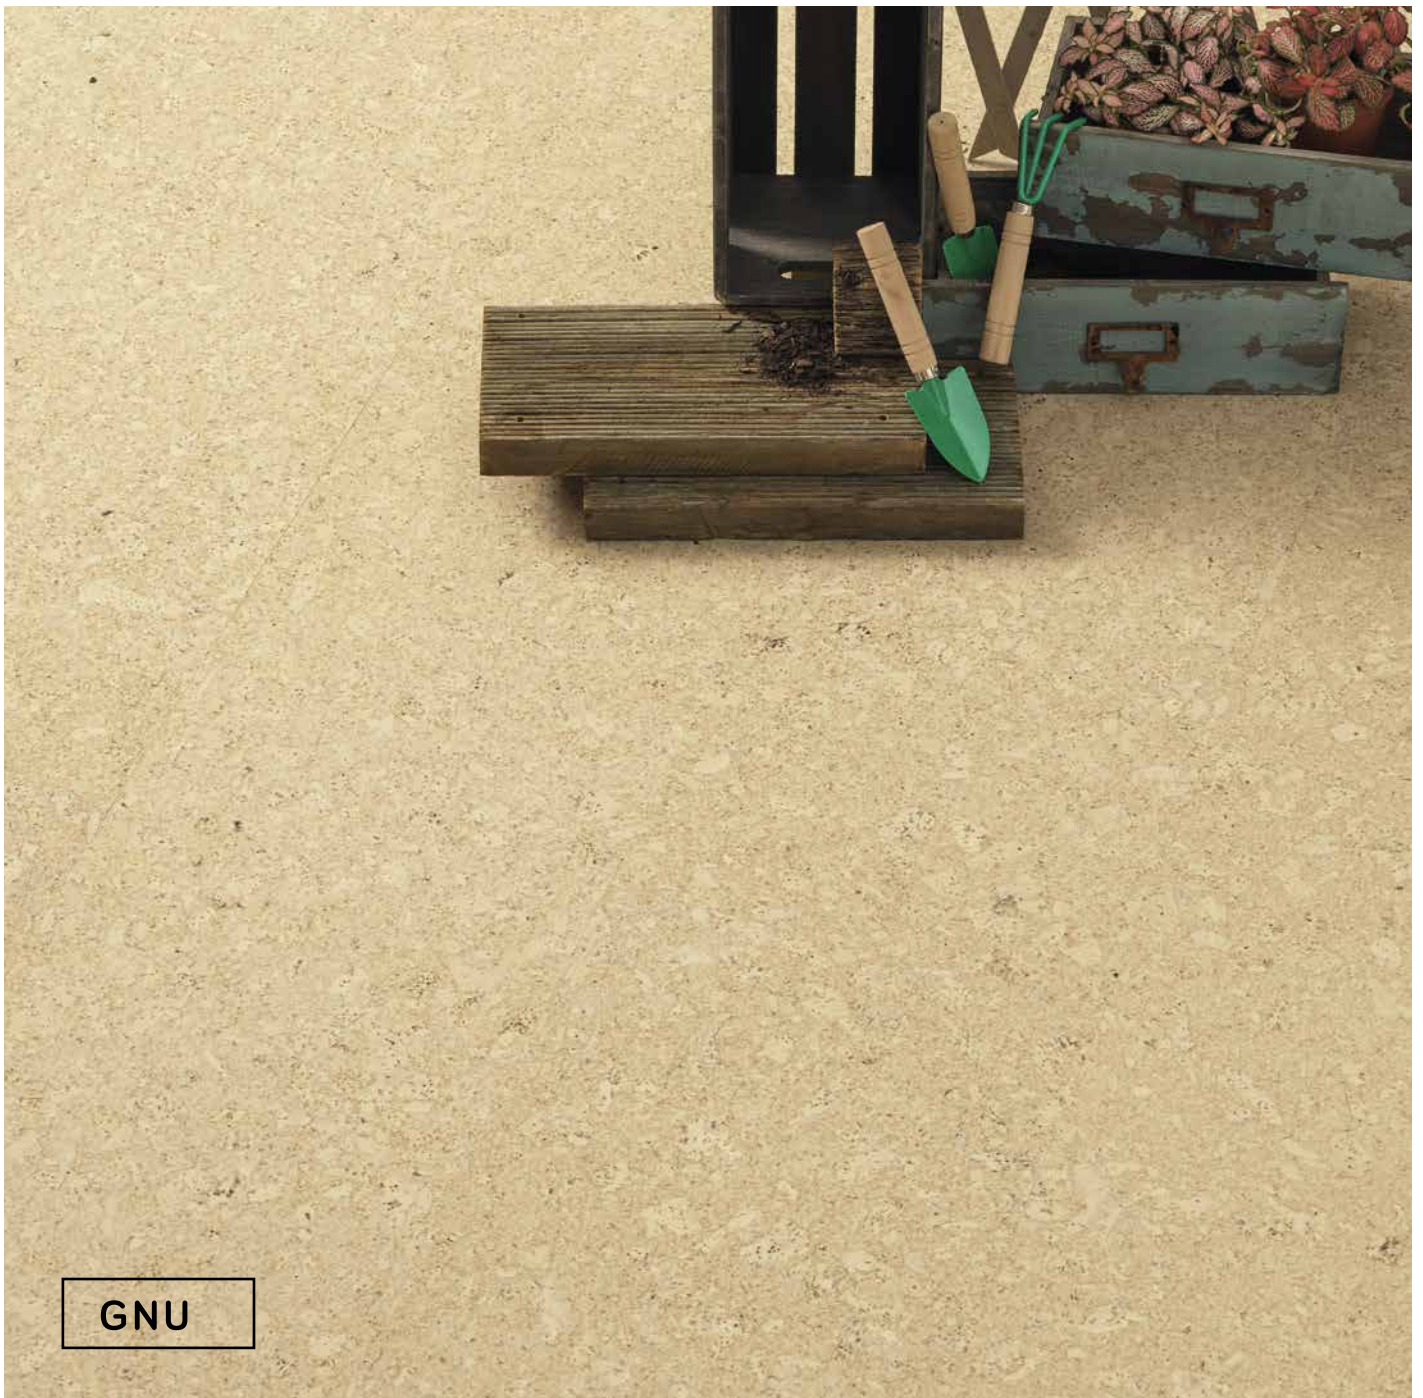

GNU

06

79 - Under Flooring (Underlays)

79 - Cleaning & Maintenance

80 - Glue Down Installation

81 - Floating Installation



82 - About Sedacor



Product
Information



Technical Data

			Method of installation	
			Glue-Down	Floating
			Cork My Way	Cork My Way
			Finishing	
			Resistant multilayer finishing	Resistant multilayer finishing
Level of Use	Standard-Test Method	Unit	Specification	Specification
Domestic	EN ISO 10874	Class	 23	 23
General Properties	Standard-Test Method	Unit	Specification	Specification
			EN 12104	EN 12104+EN 14085
Dimensions	EN ISO 24342	mm	600x450 ± 0,20% 600x300 ± 0,20% 300x300 ± 0,20% máx1,0 mm	915x300 ± 0,10% width máx0,5 mm length máx2,0 mm
		inches	23-5/8x17-23/32 ± 0,20% 23-5/8x11-13/16 ± 0,20% 11-13/16x11-13/16 ± 0,20%	36x11-13/16 ± 0,10%
Overall thickness	EN ISO 24346	mm	4 ± 0,15	10,5 ± 0,15
Squareness	EN ISO 24342	mm	<0,30	<0,30
Straightness	EN ISO 24342	mm	<0,20	<0,20
Apparent Density	EN ISO 23997/EN 672	Kg/m ³	≥ 450	≥ 700
Mass per Unit Area	EN ISO 23997	g/m ²	2000 ± 10%	8000 ± 13%
Dimensional Stability (humidity)	EN 669	%		< 5
Dimensional Stability after exposure to heat	EN ISO 23999	%	< 0,4	
Thickness of top cork surface	EN ISO 24340	mm		≥ 2,5
Openings between panels	EN 14085 (Annex B)			
Average		mm		≤0,15
Individual values		mm		≤0,2
Height difference between panels	EN 14085 (Annex B)			
Average		mm		≤0,15
Individual values		mm		≤0,2
Flatness of the panel (Length - Concave / Convex)	EN 14085 (Annex A)	%		≤0,5/≤1,0
Flatness of the panel (Width - Concave / Convex)	EN 14085 (Annex A)	%		≤0,10/≤0,15
Gloss	Glossmeter (60°)	° Gardner	12 ± 3°	12 ± 3°
Moisture Content	EN 12105	%	2,5-6	
Curling after exposure to heat	EN ISO 23999	mm	≤6	
Safety Properties (EN 14041)	Standard-Test Method	Unit	Specification	Specification
Fire Resistance	EN 13501-1	Class	E1	E1
Slip Resistance	EN 13893	Class	DS	DS
Formaldehyde Emission	DIN EN 717-1	Class	E1	E1
Electrical Behaviour	EN 1815	kV	Not Antistatic	Not Antistatic
Content pentachlorophenol (PCP)	EN 14041 (Annex B)	mg/Kg	PCP Free	PCP Free
Additional Properties	Standard-Test Method	Unit	Specification	Specification
Impact Sound Reduction	ISO 140-8	dB	13	17
Thermal Resistance	EN 12667	(m ² .K)/W	≤0,150	≤0,150
Thermal Conductivity	EN 12667	W/m.K	≤0,100	≤0,100
Castor Chair	EN 425	Visual effect after 25.000 cycles	No change of the wear layer nor delamination	No change of the wear layer nor delamination
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a foot type 2	No damage shall be visible after testing with a foot type 2
Residual Indentation	EN ISO 24343-1	mm	≤0,3	≤0,3
Stains Resistance	ISO 26987	Grade	Grau 0-unchanged	Grau 0-unchanged
Light Fastness	ISO 105-B02	Blue wool scale	<4	<4



UNDERLAYS (Under Floors)



Underlays (Under Floors)

Cork underlays provide other type of floors, such as floating wooden floors, laminated floors, etc. with extra thermal and acoustic comfort.

Available in various sizes, thicknesses and densities, they are suitable for various types of use.

Being made of cork, a natural, ecological and sustainable raw material, cork underlays are environmentally friendly, odorless, rot-proof and anti-allergic.

PREVENTIVE CARE

- If installed during construction, the floor should be installed last
- If other work has to be done after the floor is installed, protect the floor with cardboard sheets
- Do not drag furniture across the floor.
- Use felt on the feet of chairs and furniture.
- The wheels of castor chairs must comply with the DIN 68131 (Type W1) standard.
- For added protection, use a suitable mat under castor chairs.
- Put a quality mat at all points of access to retain sand, moisture and dirt.
- Never use mats with a rubber or latex bottom, as they may irreversibly stain the floor.
- Never use cleaning products with abrasive agents or solvents, such as acetone.
- Never use wire brushes.
- Avoid wetting the floor.
- Place protective mats in areas around cooking equipment and dishwashers to protect the cork flooring from spills, water, food, drinks, grease and anything else that might cause damage to the floor of your kitchen.
- Ideal and healthy environmental conditions are 35-65% relative humidity at 20°C (68°F).
- When using domestic heating intensively, the humidity of the air indoors may fall to very low levels, causing the surface to dry out excessively.
- As cork is a natural material, this may lead to shrinkage of the tiles, causing the appearance of small joints between them. To avoid this, use a humidifier. *Remember that mats placed on the floor may act as heat accumulators, which will increase the temperature of the floor surface more than the recommended maximum surface temperature (which should not exceed 20-22°C).
- Being a natural material, cork tends to lose a little color when exposed to sunlight. It is important to change the position of rugs and furniture regularly to allow the color to change evenly.
- Use curtains, blinds or another sun protection system to minimize this effect.



MAINTENANCE AND CLEANING

Operation	Recommended product
Daily / weekly cleaning	Lobacare Cleaner / Bona Spray Mop / Bona Floor Cleaner
Deep cleaning / removal of maintenance products	Lobacare Remover
Periodic maintenance	Lobacare Floorcare / Bona Polish

Please read the instructions on the packaging and leaflets for further instructions. Should you have any doubts or questions, please contact us by email: technical.support@sedacor.com.


GLUED FLOOR INSTALLATION

Reading this summary of installation instructions does not dispense with the complete installation instructions available on the site and on the floor packaging.

INSTALLATION



TOOLS REQUIRED

Short-pile roller, multipart roller, tape measure, craft knife, pencil, ruler, chalk line, cloth, rubber mallet.



MESUREMENTS



1. Find the centre of the room using a chalk line from the middle of wall A to the middle of A1. Next, make a line from the middle of wall B to the middle of wall B1. Make sure the intersection of the two lines forms a 90° angle.
2. If installation is on the diagonal, make a line using the chalk line at the intersection of lines A and B. The intersection of these lines will form an angle of 45°.
3. Verification measurement: check the size of the room by measuring or laying the tiles (without gluing) from the middle. Ensure that the width of the tiles that will be placed along the wall is identical and greater than 5 cm. If necessary, repeat the previous step by drawing a line parallel to the previous one.



APPLYING THE GLUE

This glue should be applied to the subfloor and also to the tiles.

1. Mix the glue well before use.
2. Apply the glue to the back of the cork tiles with a short-pile roller.
3. Apply the glue to the subfloor with a short-pile roller. Avoid excess glue.
4. Allow the glue to dry completely (after drying, the glue becomes transparent). Drying time on the subfloor is 40-60 minutes, depending on the temperature and R.H. on site.







APPLICATION

1. Install the tiles from the centre along the marked line, preferably using brick-bond pattern.
2. Place the tiles side by side without applying much pressure. Use a rubber mallet to affix them.
3. Remove any excess adhesive with a damp cloth.
4. Cut the tiles along the wall as indicated.
5. The installed flooring should be pressed with a 50-kg multipart roller every 30 minutes, and after installation has been completed.

RECOMMENDED GLUES

Wakol D-3540



FLOATING INSTALLATION

Reading this summary of installation instructions does not dispense with the complete installation instructions available on the site and on the floor packaging.

INSTALLATION

Uniclic® is unique because panels can be installed in two different ways:

- Method A - Angled installation method (see diagrams 1A-1B-1C).
- Method B - Horizontal installation method (see diagrams 2A-2B).

TOOLS FOR INSTALLATION OF FLOOR

Standard tools for installing floati

1. First install a protective barrier against moisture (PE film) and join the rows with tape (see diagram 3A).
2. Start the first row with an entire panel. First cut the tongue to the length and width of the panel (see diagram 3B).
3. Place the panel with the side on which the tongue was cut against the wall.
4. Put spacers from the installation kit between the panels and the wall (see diagram 3C).


The diagram indicates where the Uniclic® panels are joined using the angle technique or by blows applied to the panels (see diagrams 4A-4F).

In places where it is difficult to install the Uniclic® panels with the batten (e.g. against the wall), you may join them using a crowbar and mallet (see diagrams 5A-5B).

FINISH

Remove the spacers.

Install the skirting on the PE film making a round shape with the wall (see diagram 8A).

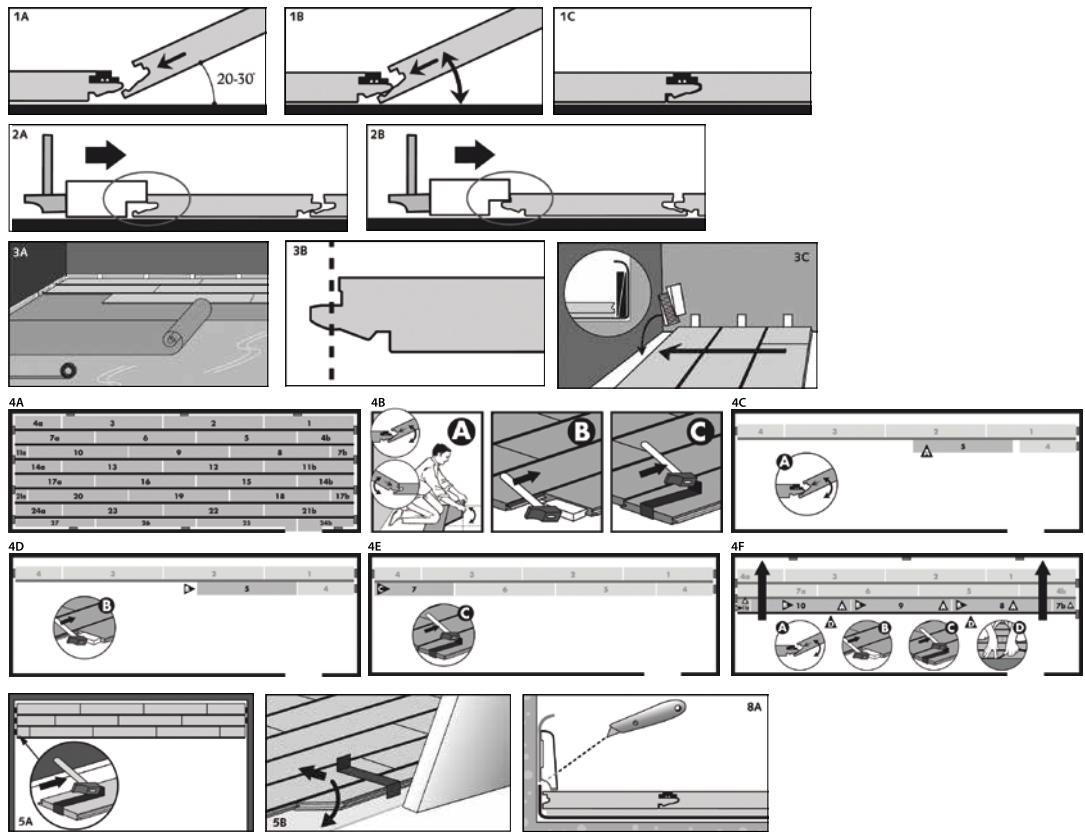



Sedacor is a company of the **JPS Cork Group**, that has been in the cork industry since 1924. We have implemented a vertical business model, which integrates cork tree forests, manufacturing, research and development as well as distribution.

Cork is the bark of the noble oak cork tree “*Quercus Suber*”, which has a lifespan of over 200 years. Every 9 years this bark is extracted in an ancient and natural process, that does not cut or harm the tree. Cork is a 100% natural, sustainable and recyclable material, with unmatched qualities that can be used in a myriad number of forms, shapes and purposes.

The cork oak forest is where we find not only the raw materials for our industry, but also the inspiration and attitude for a balanced development, matched with a pioneer attitude and constant innovation.

As result, we have grown as a company, and developed a wide variety of cork products, which are the reason for our success in both domestic and international markets.

At our plants, cork is transformed in new and ecologically friendly ways; from cork stoppers to granulated cork, from footwear to acoustic and thermal insulation and from flooring to wall covering and fabrics.

We have evolved... in production capacity, in quality and product diversity through a group of companies strategically organized in core and complementary business areas.

We overcame barriers, introduced cork to new businesses and sectors, and by doing so, became one of the world leaders in the cork industry.

By maintaining natural cork's features and applying innovation, new possibilities are created in a long cycle of sustainability.

That's the beauty of our products.

We are visionaries.

We are innovators.

We are YOUR global cork solution.



Jorge Pinto de Sá

Rio Meão
Portugal



Sedacor I

São Paio de Oleiros
Portugal



Sedacor II

Rio Meão
Portugal



Sedacor III

Ponte de Sôr
Portugal



SEDACOR
SEDACOR – Sociedade Exportadora de Artigos de Cortiça, Lda.
Rua Nova do Lameiro, 184 • 4535 - 489 S. Paio de Oleiros • PORTUGAL
Tel. +351 22 7470590 • Fax: +351 22 7453322
sedacor@jpscorkgroup.com



More information at:
www.jpscorkgroup.com
www.divinacorkoleum.com



Video Flooring



Video
Divina Corkoleum